

3M™ Scotchkote™ Abrasion Resistant Overcoat 6352HF

Data Sheet

November 2015

Handling and Safety Precautions: Read all Health Hazard, Precautionary and First Aid, Material Safety Data Sheet, and/or product label prior to handling or use.

Product Description

3M Scotchkote Abrasion Resistant Overcoat 6352HF is a hard, mechanically strong top coating for 3M Scotchkote Fusion-Bonded Epoxy Pipeline Corrosion Protection Coatings. When applied in conjunction with Scotchkote FBE coating, Scotchkote coating 6352HF enhances the overall system adhesion performance in water at elevated temperatures to form a tough outer layer that is resistant to gouge, impact, abrasion and penetration. Scotchkote coating 6352HF is specifically designed to help protect the primary corrosion coating from damage during pipeline directional drilling applications, bores, river crossing and installation in rough terrain.

3M Scotchkote Abrasion Resistant Overcoat 6352HF has increased flexibility compared to 3M Scotchkote coating 6352 while retaining properties such as impact strength and gouge resistance. Scotchkote coating 6352HF is well suited to protect mainline pipes as a result of the mechanical resistance properties and significantly improved flexibility characteristics.

It is thermosetting, integrally bonded to the base coating and does not shield from cathodic protection. Excellent flexibility provides an added service advantage over other top coating systems.

Temperature Operating Range

Scotchkote coating 6352HF, when properly applied, should perform in a satisfactory manner on pipelines operating between -100°F/-73°C and 230°F/110°C. For temperatures between 170°F/77°C and 230°F/110°C, laboratory tests indicate that thicker coatings may improve the service capability. However, it is difficult to accurately predict field performance from laboratory data due to the wide variation in actual field conditions. Soil types, moisture content, temperatures, coating thickness and other factors peculiar to the area all influence the coating performance and upper temperature operating limit.

Suggested Thickness

Thickness requirements depend on service conditions. Normally, the following thickness is used: 8 mils/200 µm to 16 mils/400 µm of 3M Scotchkote Fusion-Bonded Epoxy Coatings 6233, 6233P, or 226N and 15 mils/380 µm to 35 mils/900 µm of Scotchkote Abrasion Resistant Overcoat 6352HF.

3M™ Scotchkote™ Abrasion Resistant Overcoat 6352HF

Typical Physical and Electrical Properties

Physical Property (Test Method)	
Impact CSA Z245.20, 12.12 (Test temperature -30°C) Base Coating 15mils (381μ)/ Top Coating 5mils (127μ) Base Coating 15mils (381μ)/ Top Coating 15mils (381μ) Base Coating 15mils (381μ)/ Top Coating 25mils(635μ) Base Coating 15mils (381μ)/ Top Coating 30mils(762μ)	7 Joules 10 Joules 12 Joules 18 Joules
Bendability CSA Z245.20- 12.11 (Laboratory Mandrel Bend) (Test Temperature -30°C) Base Coating 15mils (381μ)/ Top Coating 25mils (635μ) Base Coating 15mils (381μ)/ Top Coating 35mils (889μ)	2.5°/Pipe Diameter *Plant application could vary test results 2.0°/Pipe Diameter *Plant application could vary test results
Hot Water Adhesion 24 hours, CSA-Z245.20-12.14, 203°F/95°C 48 hours, CAN/CSA-Z245.20-12.14, 167°F/75°C	1 rating 1 rating
Hardness (23°C) ASTM D 2240-97 Shore D ASTM D 2583-95 Barcol	85 32
Gouge Resistance CSA-Z245.20 12.10-12.15 R33 Double Edge Burr Bit @ -30°C 40 Kg Load SL1 Smooth Bit @ -30°C 60 Kg Load	10mils (254μ) penetration depth 8mils (203μ) penetration depth
Abrasion Resistance ASTM D 4060 (CS17 Wheel, 1000 g wt, 5000 cycles)	0.26 g
Cathodic Disbondment CSA Z245.20, 12.8 28 day, 1.5V, 3% NaCl, 176°F/85°C 28 day, 1.5V, 3% NaCl, 149°F/65°C	3.2 mm 2.6 mm
Dielectric Breakdown Voltage (ASTM D149)	1000 V/mil

Note: The typical values in this data sheet are based on lab prepared samples on steel coated with 381 μm/15 mils of 3M Scotchkote Fusion-Bonded Epoxy Coatings 226N/6233/6233P overcoated with 381μm/ 15 mils of Scotchkote coating 6352HF. Values shown are not to be interpreted as product specifications.

3M™ Scotchkote™ Abrasion Resistant Overcoat 6352HF

Typical Physical and Electrical Properties Cont'd

Physical Property	Typical Value US units (metric)
Color	Brown
Specific Gravity -Powder	1.66
Coverage based on film	117 ft. ² /lb/mil (0.613 m ² /kg/mm)
Gel Time at 400°F/204°C	
6352HF-4G	9.5 seconds ± 20%
6352HF-8G	16 seconds ± 20%



Coating Repair

Areas of pipe requiring small spot repairs shall be cleaned to remove dirt and damaged coating using surface grinders or other suitable means. All dust shall be wiped off. 3M™ Scotchkote™ Liquid Epoxy Coating 323, 327, or 328 shall be applied in small areas to the thickness as specified. The freshly coated area shall be allowed to properly cure prior to handling and storage. Liquid epoxy shall not be applied if the pipe temperature is 41°F/5°C or less, except when manufacturer's recommended heat curing procedures are followed. Alternatively, for pinhole areas, the heat bondable polymeric 3M™ Scotchkote™ Hot Melt Patch Compound 226P shall be applied in small areas to a minimum thickness of 16mils/400 µm in addition to the parent coating. Abrade the area with sandpaper. A non-contaminating heat source shall be used to heat the area to be repaired to approximately 350°F/177°C. When the Patch Compound sticks to the hot surface, it is hot enough. While continuing to heat the cleaned and prepared area, the patch compound shall be applied by rubbing the stick on the area to be repaired in circular motion to achieve a smooth, neat appearing patch. The patch shall be allowed to cool before handling.

3M™ Scotchkote™ Abrasion Resistant Overcoat 6352HF

Curing Specifications

After application, 3M Scotchkote Abrasion Overcoat 6352HF shall be allowed to cure in accordance with Figure 1 or 2. The indicated temperature is that of the outer surface of the corrosion coating primer layer. A properly calibrated IR measuring device shall measure the temperature. Alternatively, an estimate of the surface temperature shall be calculated by multiplying the primer coating thickness in mils by 2 and subtracting that value from the pipe temperature in °F (thickness in microns by 0.04 and subtracting that value from the pipe temperature: 475 °F (246 °C). Estimated temperature of coating surface = 475 - (16 x 2) = 443 °F. (In °C, 246 - (400 x 0.04) = 230 °C)

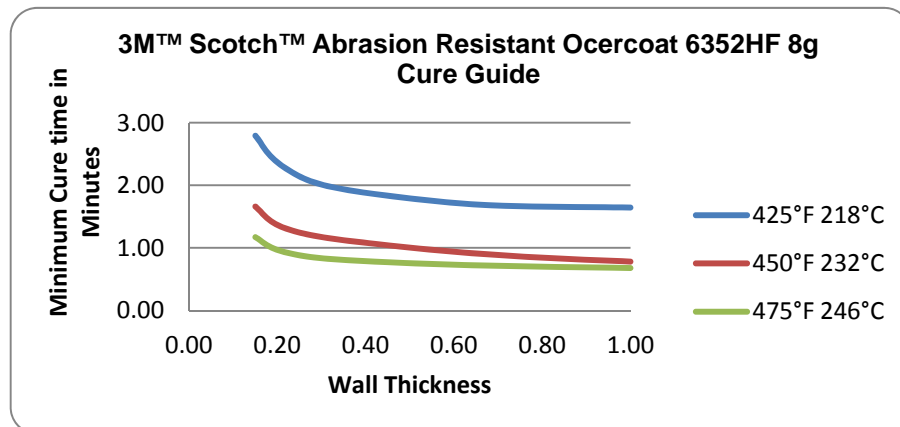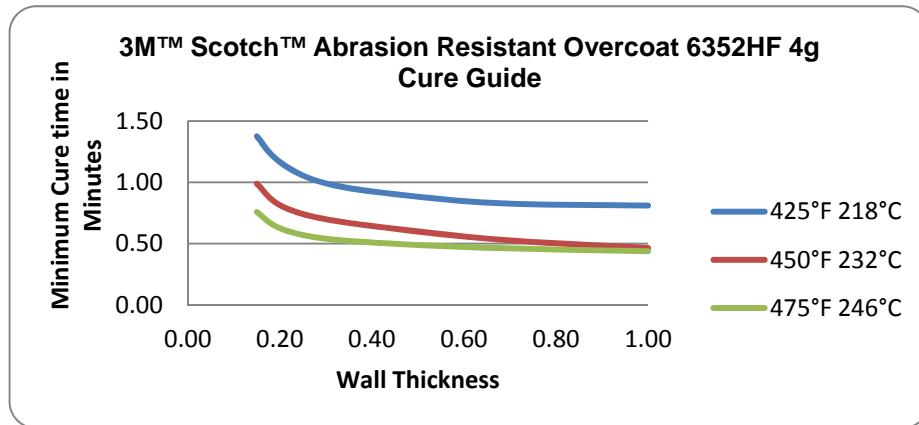

3M™ Scotchkote™ Abrasion Resistant Overcoat 6352HF

Shelf-Life

This product has a 1-year shelf life from date of manufacture. Store in original sealed containers at temperatures less than 80°F (27°C).



B&W Distributors, Inc. | PO Box 21960 Mesa, AZ 85277 | P: 480-924-8883 | F: 480-924-9100
info@bwdist.com | www.bwdist.com

3M and Scotchkote are trademarks of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product, which are not contained in 3M's current publications, or any contrary statements contained on your purchase order, shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability

Because conditions of product use are outside of our control and vary widely, the following is made in lieu of all express or implied warranties: This product will conform to 3M's published product specifications and be free from defects in material and manufacture on the date of your purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective upon your receipt, your exclusive remedy shall be, at 3M's option, to replace the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any direct, indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Electrical Markets Division
6801 River Place Blvd.
Austin, TX 78726-9000
800 722 6721
FAX: 877 601 1305
www.3M.com/corrosion

Please recycle
© 3M 2015 All rights reserved
78-8141-6808-0 Rev C